

Add-In Builder


Use a JMP® Add-In to create custom menus and easily distribute JMP scripts, applications, data tables and more.

Add-In Name

Add-In ID:

Create an Add-In with the Add-In Builder


- Choose File > New > Add-In (or File > New > New Add-In on the Mac).
- 2. In the **General Information** tab, provide an Add-in Name and an Add-in ID.
- 3. In the Menu Items tab, for each menu item:
 - Click Add Command to add the menu item 10 and provide a menu item name 2.
 - Browse for the JSL script the menu item will run. Or, copy and paste the script next to Run this JSL ③.
 - Click Add Submenu (if needed) and provide a name to group items below a single heading, or Add Separator to add a separating line 4.
- 4. If desired, use the **Start-Up Script**, **Exit Script**, or **Additional Files** tabs to add other scripts, graphics or data tables to the add-in.
- 5. Click **Save 5**. Edit the file name if desired, and click **Save**.

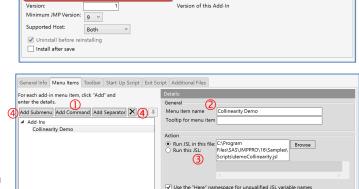

Teaching Tool - Collinearity Demo Descriptive name to help identify the add-in

com.SASInstitute.TeachingModules Unique name for the add-in (such as com.mycompany.myaddin)

General Info Menu Items Toolbar Start-Up Script Exit Script Additional Files



Browse Reset

(5)


Save Save As... Close Hel

By default, the add-in will automatically install under the Add-in menu in JMP when saved. Test the menu items to ensure that everything works as intended, and fine-tune as needed. The Add-in Builder will stay open until you close it, and saved changes will override the previously installed version of the add-in.

Share the add-in with other users. When the file is opened in JMP, all files are extracted into the appropriate folder, and the add-in is installed in the JMP Add-in menu.

Tips and Limitations

- To disable (remove from menu) or unregister (uninstall) an add-in, use View > Add-Ins.
- To edit an add-in use **File > Open**, then click the arrow next to Open and select **Open Using Add-In Builder** (on Mac, first click "Options" then check "**Edit after opening**").
- To save an application as an add-in, select Script > Save Script to Add-In from the Application Builder red triangle.



For more information on developing and deploying add-ins, visit "Scripting Guide > Creating Applications" in JMP Help. To see available add-ins, visit File Exchange > Add-Ins in community.jmp.com.